



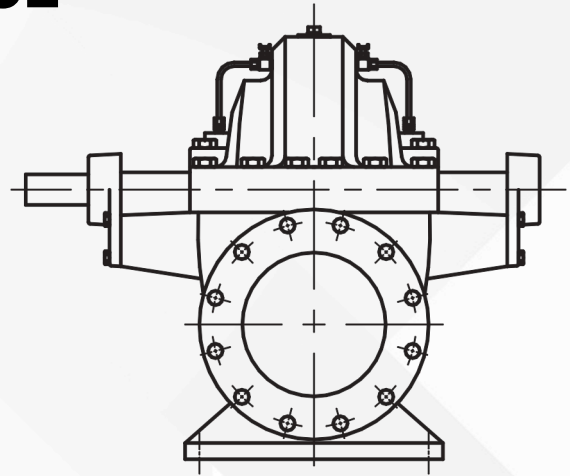

HORIZONTAL SPLIT-CASE FIRE PUMP

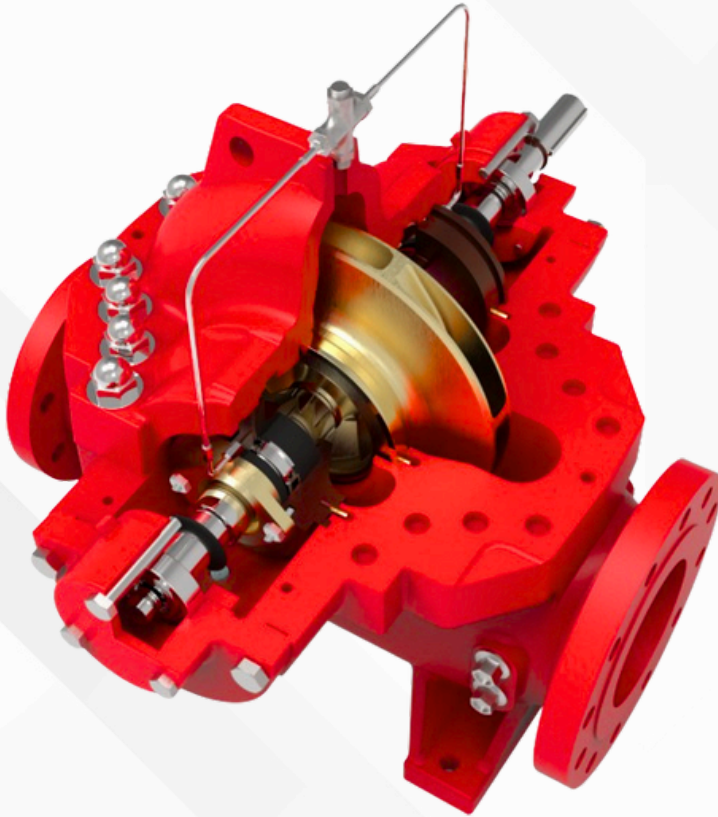

Horizontal Split-case Fire Pumps (HSC). HSC Series pumps are designed in accordance with the requirements of UL Standard for safety (UL448). HSC pumps are high flow rate, high efficiency, stable operation, low noise and long service life, easy to install and maintain.

CAPACITY: 450 GPM to 2000 GPM

SL No.	Rated Capacity, US GPM	Size, In.	Model	Pressure Rating, psi	Approx Speed RPM	Maximum Working Pressure Psi
1	450	6X4	ESF100-250	80-141	2900	232
2	450	6X4	ESF100-310	131-204	2900	290
3	450	6X4	ESF100-375	221-304	2900	400
4	500	6X4	ESF100-250	80-140	2900	232
5	500	6X4	ESF100-310	130-204	2900	290
6	500	6X4	ESF100-375	219-300	2900	400
7	750	6X4	ESF100-250	73-139	2900	232
8	750	6X4	ESF100-310	125-198	2900	290
9	750	6X4	ESF100-375	199-280	2900	400
10	1000	8X5	HSC125-290	100 - 181	2900	232
11	1250	8X5	HSC125-290	92 - 177	2900	232
12	1500	8X6	HSC150-290	99 - 156	2900	232
13	2000	8X6	HSC150-290	94 - 150	2900	232

UL LISTED CERTIFIED & APPROVED PUMPS Compliance to NFPA 20 Design Requirements



www.amanfire.com



info@amanfire.com



+971 4 258 0090



DUBAI, UAE

