




VERTICAL TURBINE PUMP

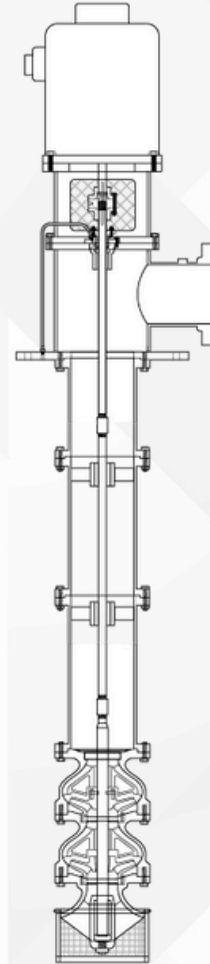

Vertical Turbine centrifugal pump is designed according to NFPA20, an underground water source where the water level is under the pump room. Moreover, the impellers are fully immersed in the water maintaining prime at all times.

CAPACITY: 50 GPM to 1000 GPM



www.amanfire.com



info@amanfire.com



+971 4 258 0090



DUBAI, UAE



SELECTION CHART

Model	Rated Capacity, US gpm	*Rated Net Pressure Range, psi		Stages	Discharge Size In.	Approx Speed, RPM
		Min.	Max.			
AM225 -80VT	50	96	224	3 to 6	5	2900
	100	94	218			
	150	94	215			
	200	92	213			
	250	90	209			
	300	86	202			
	50	99	232			2950
	100	98	226			
	150	97	223			
	200	95	220			
	250	93	217			
	300	90	210			
AM250 -14VT	100	119	256	3 to 6	6	2900
	200	114	246			
	250	112	242			
	300	110	237			
	400	103	221			
	500	95	208			
	100	123	265			2950
	200	118	254			
	250	116	251			
	300	114	246			
	400	107	229			
	500	100	217			
AM300 -25VT	300	130	329	3 to 6	8	2900
	400	126	324			
	450	124	319			
	500	122	317			
	750	109	291			
	1000	124	263			
	300	135	341			2950
	400	131	336			
	450	129	331			
	500	127	329			
	750	113	304			
	1000	129	273			

UL LISTED CERTIFIED & APPROVED PUMPS Compliance to NFPA 20 Design Requirements



www.amanfire.com



info@amanfire.com



+971 4 258 0090



DUBAI, UAE

